

BS25S3

BATTERY/ PV / GRID



Microgrid System

BS series hybrid energy genset is composed of photovoltaic, battery, etc. It's suitable for variable load, sudden load, long-term low power operation and other conditions, zero-emission, ultra-quiet, reducing the cost, protect the ecological environment. Mainly used in residential, small commercial, island power and other fields.

Product Features



- Smart energy management system
- AC/DC power conversion system
- PV charging system
- LiFePO4 liquid-cooled battery pack
- RCD leakage protector
- Plug and play interface
- Super-silent structure
- Fire safety system

Certification Standards



- UN 38.3
- IEC 62619
- IEC 62477
- IEC 62933-2-1
- CE Declaration of Conformity
- VDE-AR-N 4110
- EN-50549-1
- UL 1973

Intelligent Energy Management

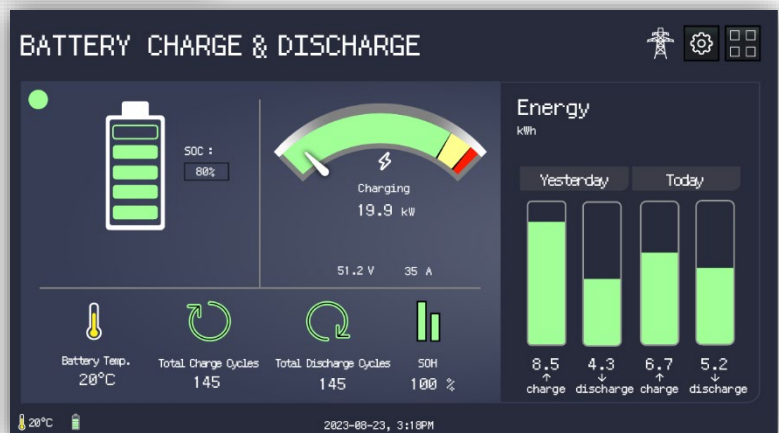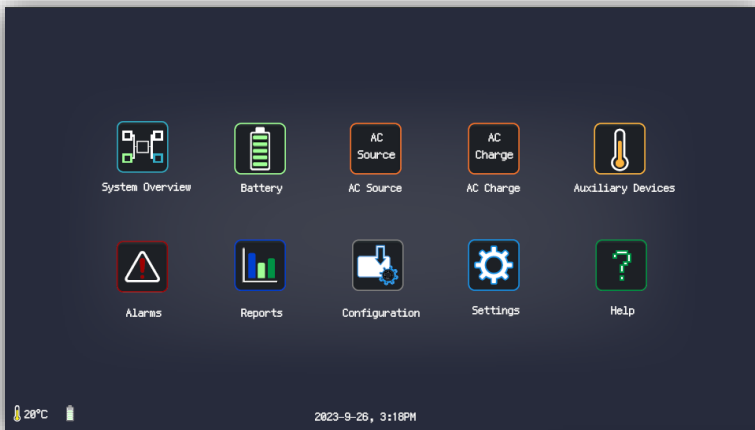

BS25S3 SPECIFICATION

BS25S3 HYBRID ENERGY SYSTEM

Rated power (kVA/kW)	25/25		
Frequency (Hz)	50		
Phase(P)	3		
Power factor (PF)	1		
Noise level dBA@7m	50		
Voltage (AC V)	380	400	415
Current (A)	38	36	35

GRID INPUT

Rated power (kVA/kW)	25/25
----------------------	-------

BATTERY SYSTEM

Battery type	LiFePO4
Battery capacity (kWh)	38
Battery voltage (DC V)	160-700
Max charging rate	1C
Max discharging rate	1C
Recommended discharging rate	1C

PV SYSTEM

MPPT rated power (kWp)	32
Rated voltage (DC V)	150-850
Solar panel capacity (kWp)	/

LOGISTICS DATA

Dimensions (mm)	2600 x 1300 x 1850
Dry Weight (kg)	824
40" Loading (Qty)	4

